3007 series

30x30x07 mm

DC Fan

P&Q Curve

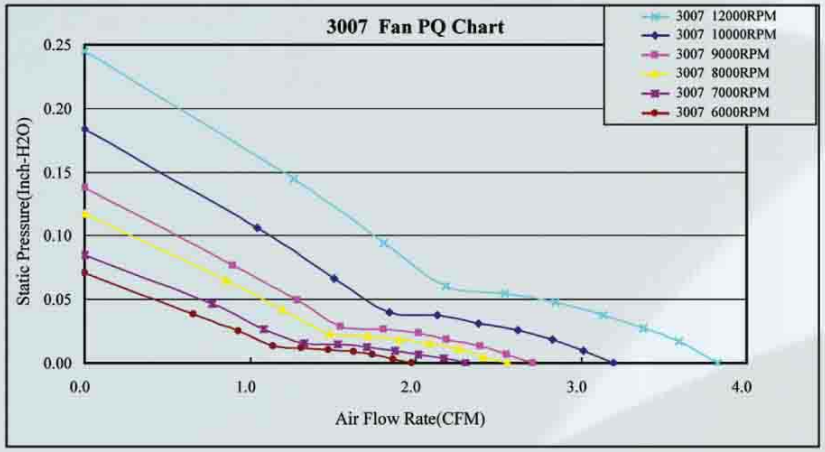

Dimensions Draving

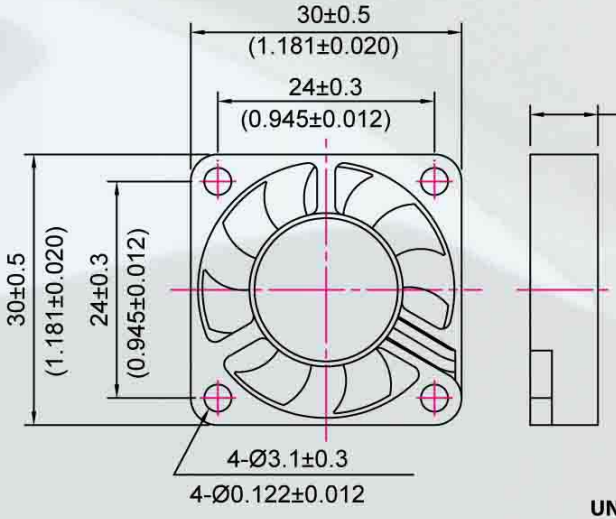

UNIT：MM（INCH）

Specitications

Model	Rated Voltage (VDC)	Rated Current (AMP)	Power Consumption (WATTS)	Speed Reference (RPM)	Air Flow (CFM)	Ssatic Pressure (Inch-H_2O)	Noise (dBA)
TFD-3007SH05X	5	0.22	1.1	12000	3.82	0.25	<36.2
TFD-3007HH05X	5	0.18	0.9	10000	3.2	0.18	<30
TFD-3007H05X	5	0.16	0.8	9000	2.71	0.14	<26
TFD-3007M05X	5	0.14	0.7	8000	2.56	0.12	<21
TFD-3007L05X	5	0.12	0.6	7000	2.3	0.09	<17
TFD-3007LL05X	5	0.1	0.5	6000	1.98	0.07	<13.7
TFD-3007SH12X	12	0.14	1.68	12000	3.82	0.25	<36.2
TFD-3007HH12X	12	0.11	1.32	10000	3.2	0.18	<30
TFD-3007H12X	12	0.09	1.08	9000	2.71	0.14	<26
TFD-3007M12X	12	0.08	0.96	8000	2.56	0.12	<21
TFD-3007L12X	12	0.06	0.72	7000	2.3	0.09	<17

- Material：impeller & Frame：Plastic(UL 94V-O)
- Lead Wires：
  UL 1007 AWG#28 Or Equivalent
  Red Wire Positive(+), Black Wire Negative(-), Yellow Wire Or Blue Wire Signal(FG)
- Function type is optional
- The max air flow and the speed are measured in free air; max air pressure is measured at zero air flow
- Noise is measuerd in anechoic chamber in free air, one meter from intake side
- All readings are typical values at rated voltage
- Specifications are subject to change with notice
- Additional special function may be added according the requirement of customer